


LD-1120-BF-200

Fiber Coupled High Power Laser Diode – 200mW @1120nm ex-fiber



Features:

- InAs/GaAs Quantum Well based diode laser
- Proprietary mirror coating technology enabling high reliability
- CW or pulse (down to 2ns pulse width) operation
- High reliable Au/Sn-technology
- Optional: polarization maintaining PM980 fiber
- Optional: integrated monitor photodiode for power control

Specification

DATE: 18th June 2010

SPECIFICATIONS


Test conditions: CW operation, thermistor temperature 25°C

Parameters	Symb.	Min.	Typ.	Max.	Unit
Output power	P_{out}	200			mW
Mean wavelength at P_{out} ¹	λ_P	1110	1120	1130	nm
Spectral width @ -3dB level at P_{out}	$\Delta\lambda$		4	8	nm
Wavelength temperature tunability	$\Delta\lambda/\Delta T$	0.35	0.4	0.45	nm/°C
Threshold current	I_{th}		80	120	mA
Operating current at P_{out}	I_{op}		500	600	mA
Forward voltage at P_{out}	V_f		1.4	1.5	V
Polarization Extinction Ratio ²	PER	15	17		dB
Recommended operating temperature (on thermistor)	T_{op}	15	25	30	°C

¹ Weighted mean ("center of mass") spectral point.

² In the case of polarization maintaining fiber.


DIMENSIONS (All sizes in mm)

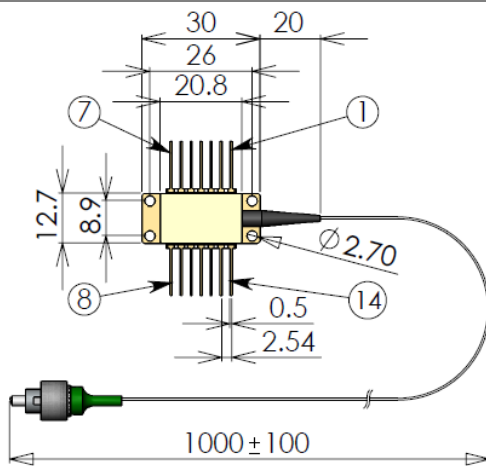

- Pin identification:**
1. TEC "+"
 2. Thermistor
 - 3.
 - 4.
 5. Thermistor
 - 6.
 - 7.
 - 8.
 - 9.
 10. Laser Diode anode "+"
 11. Laser Diode cathode "-"
 - 12.
 13. Case
 14. TEC "-"



ABSOLUTE MAXIMUM RATINGS			
Parameters	Min.	Max.	Unit
Laser Diode reverse voltage		1	V
Laser Diode CW forward current		1000	mA
Thermo Electric Cooler current		3	A
Thermo Electric Cooler voltage		4	V
Storage temperature range (in original sealed pack)	5	80	°C
Case operating temperature range	10	50	°C

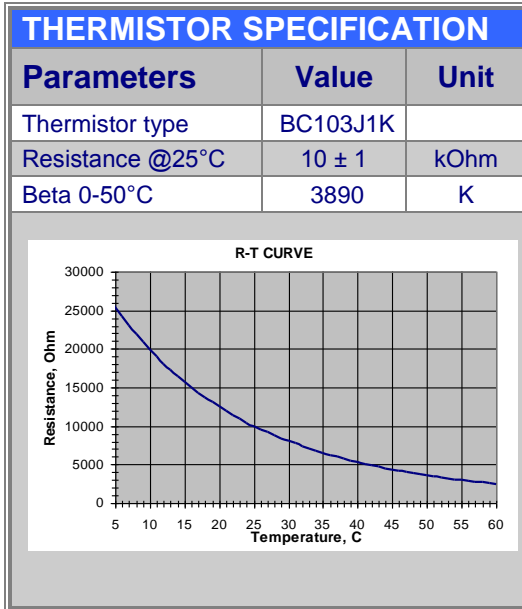

FIBER SPECIFICATION			
Parameters	HI1060	PANDA PM980	Unit
Numerical aperture (Typical)	0.14	0.14	
Cutoff wavelength	920±50	920±50	nm
Mode-field diameter (@1060nm)	6.2±0.3	6.6±0.3	µm
Cladding diameter	125±1	125±1	µm
Coating diameter	245±15	245±15	
Length	1.0 ± 0.1		m
Connector	FC/APC connector		


SAFETY AND OPERATING INSTRUCTIONS

The laser light emitted from this device is invisible and will be harmful to the human eye. Avoid looking directly into the output fiber or into the collimated beam along its optical axis when the device is in operation. Proper laser safety eyewear must be worn during operation.

Operating the laser diode outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with the component must be employed such that the maximum forward current cannot be exceeded. A proper heatsink for the laser diode module on thermal radiator is required. The module must be mounted on radiator with screws (bolt down in X-style fashion with initial torque set to 0.075Nm and final X-style bolt down at 0.15Nm) or clamps. The deviation from flatness of radiator surface must be less than 0.05mm. It's recommended using of In-foil or similar between bottom of the module and heatsink for thermal interface.

Carefully handle the fragile fiber, do not apply any stress, do not pull the fiber, do not bend fiber with a radius smaller than 3cm. Operate the laser module with clean fiber connector only. Periodically check and clean the connector if necessary. To clean the connector use suitable fiber cleaning tools (e.g. special cleaning tissue for optics). Perform cleaning only while the laser is switched off. Protect the fiber connector with protection cap while it's unplugged.

ESD PROTECTION – Electrostatic discharge is the primary cause of unexpected Laser Diode failure. Take extreme precaution to prevent ESD. Use wrist straps, grounded work surfaces and rigorous antistatic techniques when handling laser diodes.




LASER RADIATION
 AVOID EXPOSURE TO THE BEAM
 CLASS 3B LASER PRODUCT

CAUTION
 STATIC SENSITIVE DEVICE
 OBSERVE PRECAUTIONS

DANGER

VISIBLE AND/OR INVISIBLE LASER RADIATION
 AVOID EYE OR SKIN EXPOSURE TO
 DIRECT OR SCATTERED RADIATION



DIODE LASER
 MAX POWER 0.5W
 WAVELENGTH 1000 - 1400 nm
 CLASS IIIb LASER PRODUCT