

1550 nm Femtosecond Fiber Lasers

FFL-W Series

WIDE TUNING RANGE PICO-SECOND and FEMTOSECOND FIBER LASERS

PriTel's FFL-W Series of 1550 nm Picosecond and Femtosecond Fiber Lasers tune over a wide wavelength range of 1517 nm - 1570 nm. They are designed for R&D applications in telecommunications, optical switching, photonic crystals, and others.

The FFL is self-starting, easy to use and requires no ancillary equipment for operation. This FFL is a "turnkey" source.

The **Quick-Change Pulswidth** feature is standard on every FFL model. This design enables the user to change the operating pulswidth of the FFL within minutes just by replacing a self-aligning cartridge.



Specifications

FFL

Pulse repetition rate	5-50 MHz, fixed		
Average output power	Varies with pulswidth and pulse repetition rate (e.g., >2 mW at 2 ps and 20 MHz)		
Timing jitter*	<1 ps		
<i>Pulswidths available**</i>	<i>Spectral width (nm)</i>	<i>Tunable wavelength (nm)</i>	<i>Peak Power (W)</i>
< 10 ps	> 0.3	1517-1570	> 10
< 5 ps	> 0.4	1517-1570	> 25
< 2 ps	> 1.0	1517-1570	> 50
< 700 fs	> 3.5	1517-1570	> 100

Optical

Gain medium	Er-doped silica fiber
Pump source	980 nm diode laser
Connectors	FC/APC (other connectors available on request)

Environmental

Operating temperature	+15 to 30°C
Storage temperature	-20 to 50°C

Electrical/ Mechanical

Operating Voltage	85-264 VAC at 47-63 Hz
Power consumption	< 50 W
Dimensions (2U)	10 cm x 26 cm x 36 cm
Weight	9 kg

Note: The FFL Series offers front-panel electrical sync pulse output for synchronizing the optical pulse train to an external system.

* Defined as short-term, pulse-to-pulse jitter.

** Inquire about special pulswidths.









PriTel, Inc.

P.O. Box 4025, Naperville, IL 60567-4025, USA

Ph: 630-983-2200, Fx: 630-983-2260 (USA)

E-mail: PriTel@PriTel.com, Internet: www.PriTel.com

Typical Performance of PriTel's FFL-W

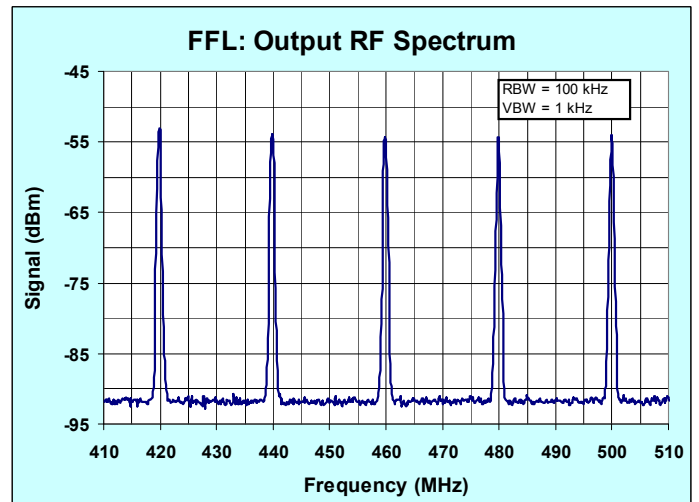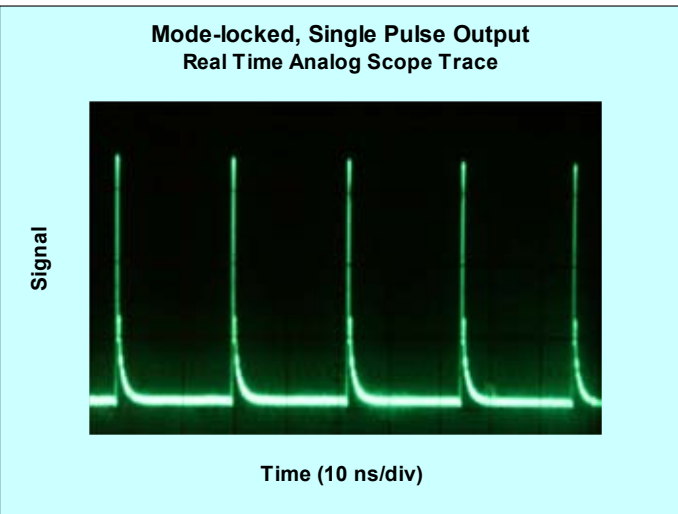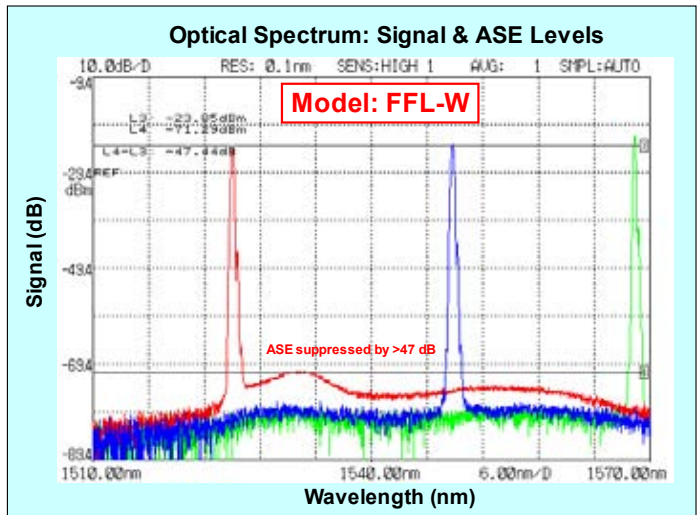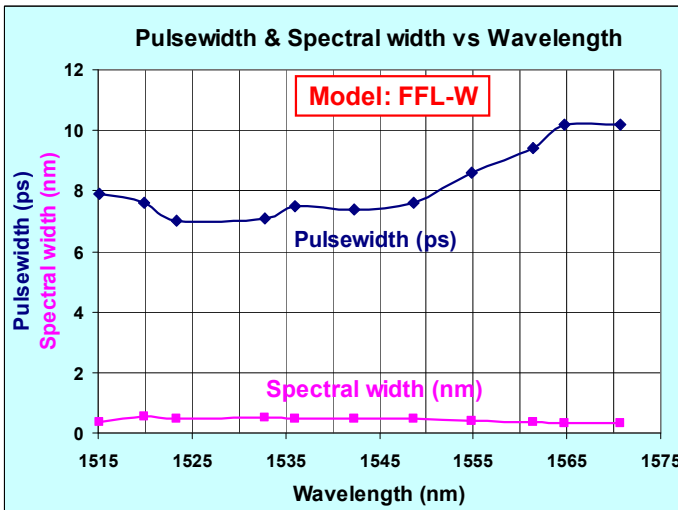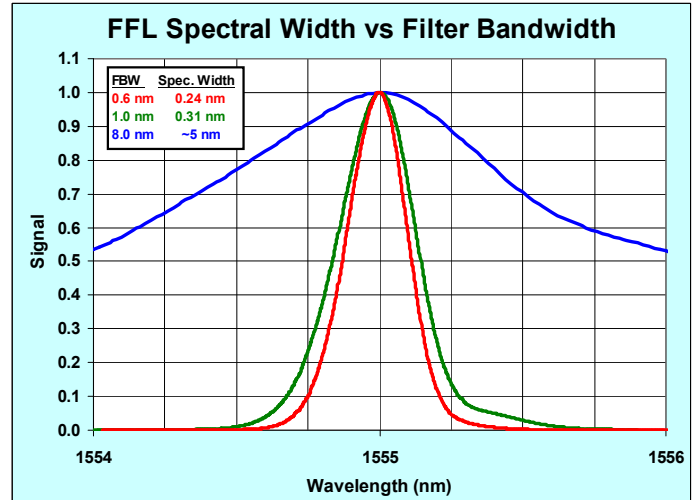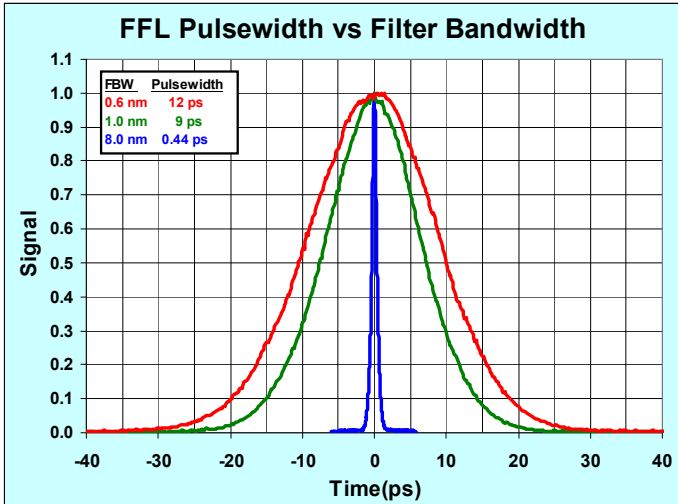

Information contained herein is deemed to be reliable and accurate. PriTel, Inc. assumes no responsibility and shall have no liability relating to its use. PriTel, Inc. reserves the right to change product specifications at any time without notice.

