

**Hybrid Isolator: 1480/1550 WDM +Isolator**

**Hybrid Isolator: 1480/1590 WDM +Isolator**

**Features**

- High Isolation
- Low Insertion Loss
- High Return Loss
- Low PDL
- Optical Path Epoxy Free

**Applications**


- Fiberoptic Amplifiers
- CATV Fiberoptic Links
- Fiberoptic Systems Testing
- Fiberoptic LAN Systems
- Telecommunications

**Specifications**

Parameter		Unit	Single stage	Dual stage
Signal Channel	Wavelength Range ( $\lambda_s$ )	dB	1530-1565, 1570-1610	
	Insertion loss( $@\lambda_s$ , All SOP)	Typ	dB	0.7
	Insertion loss( $@\lambda_s, 0-70^\circ\text{C}$ , All SOP)	Max	dB	0.9
	Peak Isolation		dB	40
	Isolation( $@\lambda_s, 23^\circ\text{C}$ , All SOP)	Min	dB	30
	Channel Isolation( $@\lambda_s, 23^\circ\text{C}$ , All SOP)	Min	dB	30
	PDL	Max	dB	0.1
	PMD	Max	ps	0.1
Pump Channel	Wavelength Range ( $\lambda_p$ )	dB	1460-1500	
	Insertion loss( $@\lambda_p$ , All SOP)	Typ	dB	0.4
	Insertion loss( $@\lambda_p, 0-70^\circ\text{C}$ , All SOP)	Max	dB	0.6
	Channel Isolation( $@\lambda_p, 23^\circ\text{C}$ , All SOP)	Min	dB	17
	PDL	Max	dB	0.1
Directivity	Min	dB	60	
Return loss	Min	dB	55	
Optical power	Max	mW	300	
Operation Temperature		$^\circ\text{C}$	-20 to 70	
Storage Temperature		$^\circ\text{C}$	-40 to 85	

\* SOP=State Of Polarization

**Imagine**

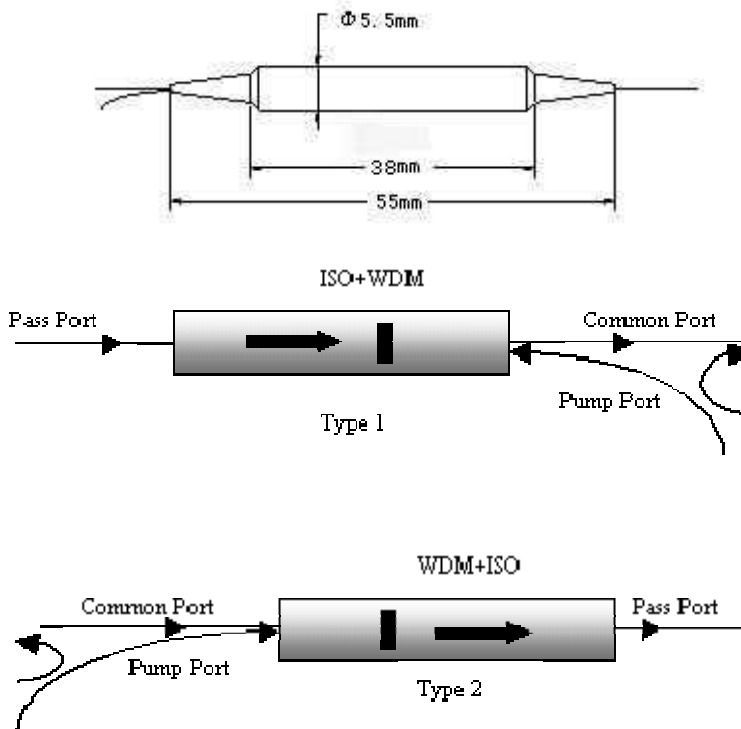

**Ordering Information**

IWDM	Central wavelength	Stage	Type	Pigtail	Fiber length	Connector
	95=980/1550nm 99=980/1590nm 45=1480/1550nm 49=1480/1590nm xx=others	D=Dual stage S=Single stage	F=Type 1 B=Type 2	B=250um bare fiber L=900um	10=1.0m 15=1.5m 20=2.0m ..... 30=3.0m	NE=None FA=FC/APC FC=FC/PC SA=SC/APC SC=SC/PC ST=ST/PC LA=LC/APC LC=LC/PC XX=others