

1550 nm Femtosecond Fiber Lasers

FFL-TW Series

PICOSECOND and FEMTOSECOND FIBER LASERS

PriTel's FFL Series of 1550 nm Picosecond and Femtosecond Fiber Lasers are designed for R&D applications in telecommunications, fiber lasers, optical switching, measurement of optical fiber dispersion and nonlinearities, and others.

Primary optical output of the FFL is PM.

The FFL is self-starting, easy to use and requires no ancillary equipment for operation. This FFL is a "turnkey" source.

The **Quick-Change Pulsewidth** feature is standard on every FFL model. This design enables the user to change the operating pulsewidth of the FFL within minutes just by replacing a self-aligning cartridge.



Specifications

FFL-TW

Pulse repetition rate	20 - 100 MHz, fixed		
Average output power	Varies with pulsewidth and pulse repetition rate (e.g., >4 mW at 2 ps and 40 MHz)		
Timing jitter*	<1 ps		
<i>Pulsewidths available**</i>	<i>Spectral width (nm)</i>	<i>Tunable wavelength (nm)</i>	<i>Peak Power (W)</i>
<10 ps	>0.3	1530-1564	>25
<5 ps	>0.4	1530-1564	>50
<2 ps	>1.0	1540-1564	>100
<600 fs	>4.0	1540-1560	>150
<300 fs	>8 nm	1540-1560	>200
<100 fs	>25	Fixed wavelength	>200

Optical

Gain medium	Er-doped silica fiber
Pump source	980 nm diode laser
Connectors	FC/APC (other connectors available on request)

Environmental

Operating temperature	+15 to 30°C
Storage temperature	-20 to 50°C

Electrical/ Mechanical

Operating Voltage	85-264 VAC at 47-63 Hz
Power consumption	<50 W
Dimensions (2U)	10 cm x 26 cm x 36 cm
Weight	9 kg

Note: The FFL Series offers front-panel electrical sync pulse output for synchronizing the optical pulse train to an external system.

* Defined as short-term, pulse-to-pulse jitter.

** Inquire about special pulsewidths.







PriTel, Inc.

P.O. Box 4025, Naperville, IL 60567-4025, USA

Ph: 630-983-2200, Fx: 630-983-2260 (USA)

E-mail: PriTel@PriTel.com, Internet: www.PriTel.com

Typical Performance of PriTel's FFL

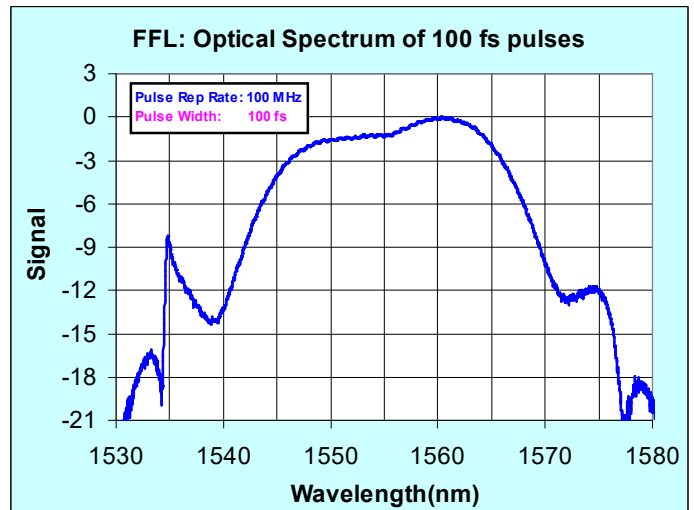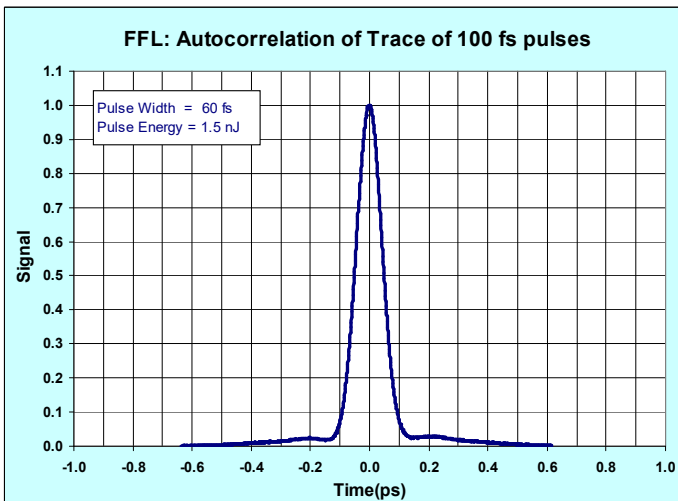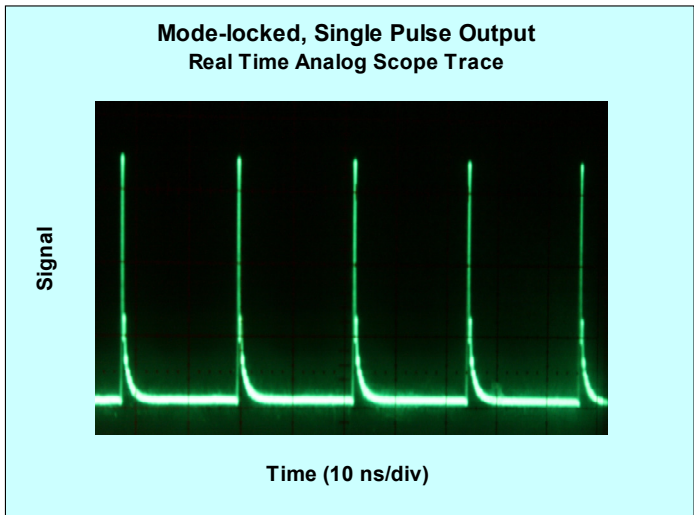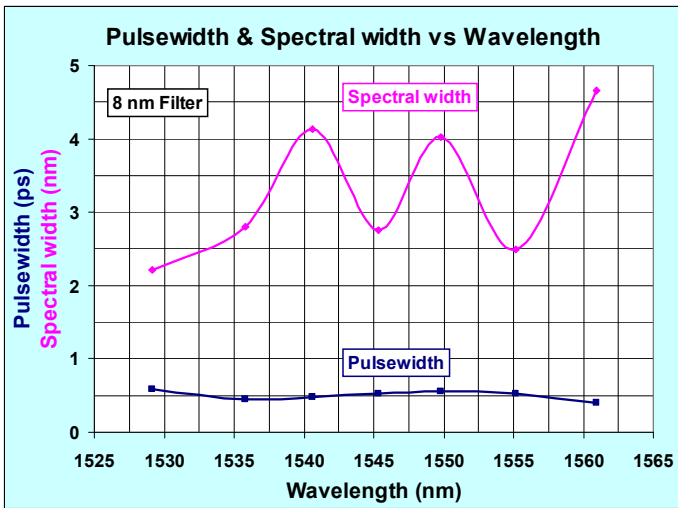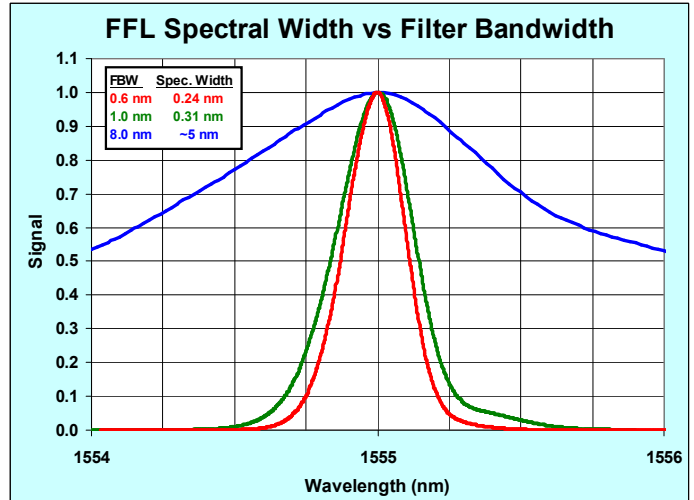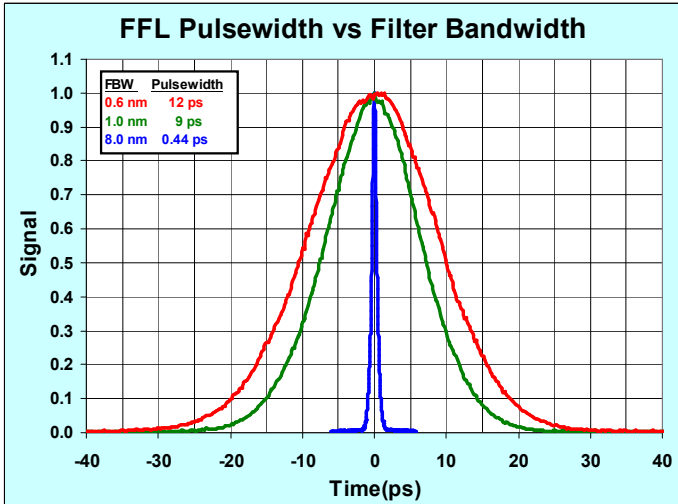

Information contained herein is deemed to be reliable and accurate. PriTel, Inc. assumes no responsibility and shall have no liability relating to its use. PriTel, Inc. reserves the right to change product specifications at any time without notice.

