


Faraday Mirror

Specifications

Parameter	Value
Center Wavelength	1310, 1480 or 1550 nm
Operating Wavelength Range	±30nm
Typical Insertion loss	0.4dB
Maximum Insertion loss	0.6dB
Faraday Rotation Angle (Single Pass)	45 degree
Rotation Angle Tolerance over Wavelength and Temperature	±0.5 degree
PDL	<0.05dB
PMD	<0.05ps
Optical Power Handling	300mW
Max. Tensile Load	5N
Package Dimension	Dia4.5X31(L)mm
Operating Temperature	-5 to + 70℃
Storage Temperature	-40 to +85℃

Imagine

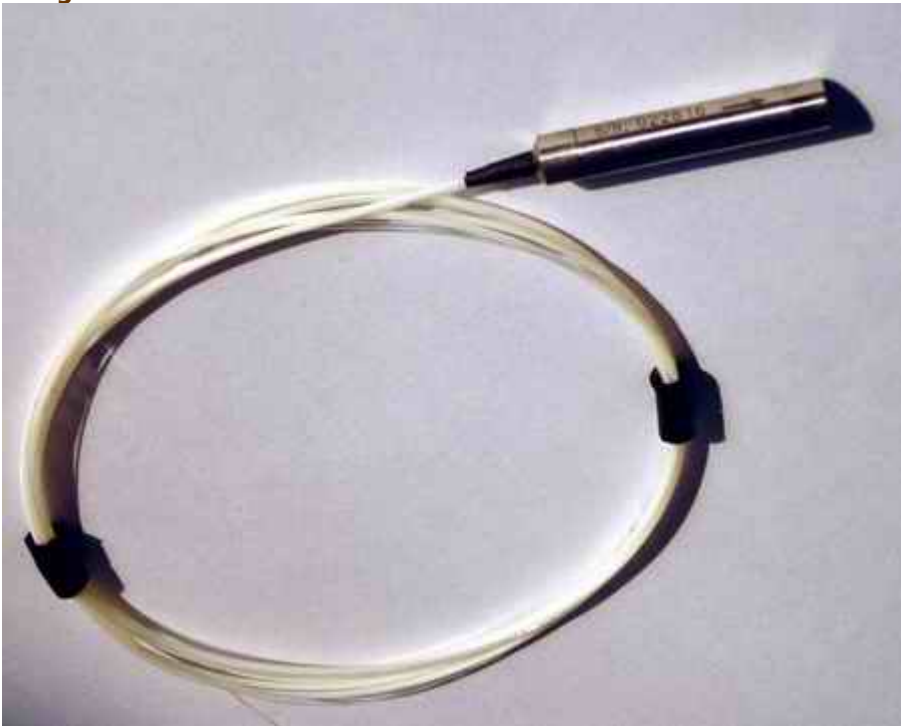

Ordering Information

FRDMR	Center Wavelength	Fiber Type	Fiber Length	Connector
	13=1310nm 14=1480nm 15=1550nm	1- 250 um 2- 900um	1=1.0m 2=2.0m S=Specify	NE=None FA=FC/APC FC=FC/PC SA=SC/APC SC=SC/PC ST=ST/PC LA=LC/APC LC=LC/PC XX=others