


## Polarization Maintaining (PM) Connector and Patchcord

### Specifications

Parameter	Value
Insertion loss	≤0.3dB
extinction ratio	>23dB
Operating Wavelength	1310/1550/1060
Repeatability	+/- 0.2dB
Connector	FC, SC
Operating Temperature	-20℃~+85℃
Storage Temperature	-40℃ to +85℃

### Imagine

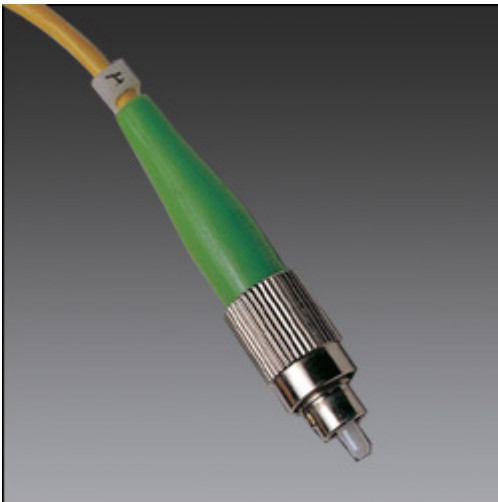

### Ordering Information

JPFiber Mode	Connector1Type	Connector2Type	Cable Type	Length of Fiber/ Cable	Wavelength	Key Width (For FC)
S=Singlemode M=Multimode P=PM fiber X=others	FC=FC/PC SC=SC/PC FU=FC/UPC SU=SC/UPC FA=FC/APC SA=SC/APC ST=ST/PC LC=LC/PC xx=Others	FC=FC/PC SC=SC/PC FU=FC/UPC SU=SC/UPC FA=FC/APC SA=SC/APC ST=ST/PC LC=LC/PC xx=Others	1=0.9mm 2=2mm 3=3mm x=Others	01=1.0m 02=2.0m 03=3.0m 04=4..0m xx=others	10=1060nm 13=1310nm 15=1550nm xx=others	R=2.00mm N=2.14mm X=No PC