


Polarization Maintaining (PM) Filter Coupler

Specifications

Parameter	Value	
Center Wavelength	1550±40nm	
Type	1x2	2x2
Excess Loss Max.	0.7dB	1.0dB
Max Uniformity	0.6dB	0.8dB
Extinction Ratio	>20dB	>16dB
Tap Ratio	1±0.2%, 2±0.4%, 4±0.8%, 5±1.0%, 10%, 20% and 50%	
Return Loss*	>50dB	
Fiber type	PM Panda Fiber or SMF-28 for Tap Port, PM Panda Fiber for Input & Output Port	
Operation Temperature	-5 to 70°C	
Storage Temperature	-40 to 85°C	

Imagine

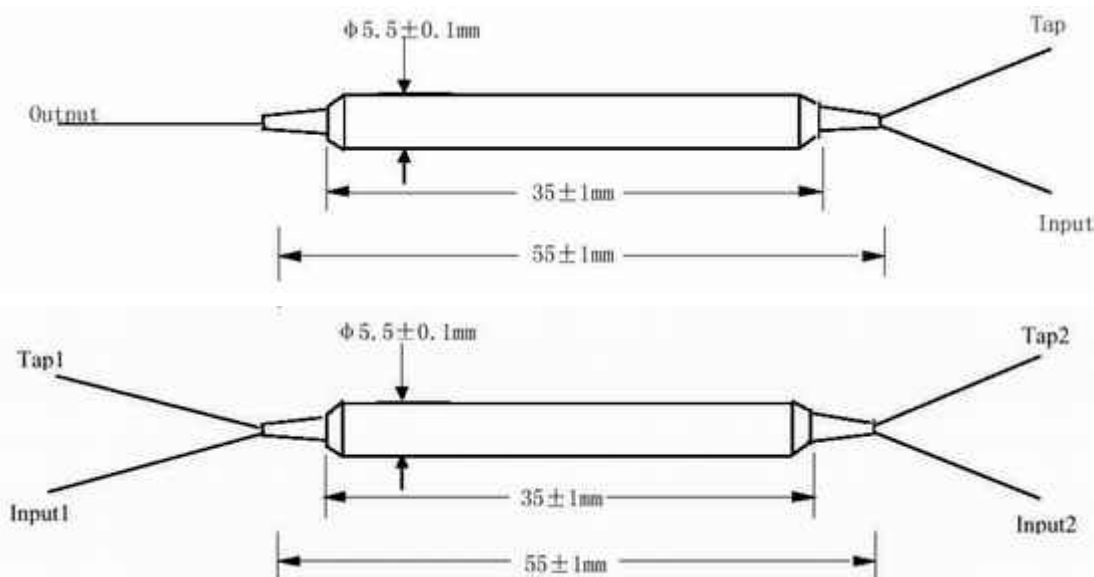

Ordering Information

PMC	Wavelength	Port	Coupling Ratio	Pigtail Type at Output and Input Port	Pigtail Type at Tap port	Fiber length	Connector
	10=1064nm 13=1310nm 14=1480nm 15=1550nm	12=1x2 22=2x2 24=2x4	50=50/50 30=30/70 20=20/80 05=5/95 01=1/99	B=250um Panda fiber D=400um Panda fiber L=900um Panda fiber	S=250um bare fiber PM=Panda PM fiber	10=1.0m 15=1.5m 20=2.0m 30=3.0m	NE=None FA=FC/APC FC=FC/PC SA=SC/APC SC=SC/PC