


Polarization Maintaining Optical Fiber Mirror

Specifications

Parameter	Value
Center Wavelength	1310 or 1550 nm
Operating Wavelength Range	±20nm
Typical Insertion loss	0.5dB
Maximum Insertion loss	0.7dB
Min. ER	22dB
Fiber Type	PM 1310/1550 panda fiber
Optical Power Handling	300mW
Max. Tensile Load	5N
Package Dimension	Dia5.5X35(L)mm
Operating Temperature	-5 to + 70°C
Storage Temperature	-40 to +85°C

Imagine

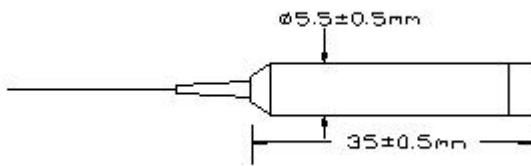

Ordering Information

PMMR	Center Wavelength	Fiber Type	Fiber Length	Connector
	13=1310nm 15=1550nm	B- PM panda fiber, 250 um L- PM panda fiber, 900um C-PM panda fiber, 3mm cable	1=1.0m 2=2.0m S=Specify	NE=None FA=FC/APC FC=FC/PC SA=SC/APC SC=SC/PC ST=ST/PC LA=LC/APC LC=LC/PC XX=others