


Infinity HT 6000™ Series

HT6000 Vertical CO2 Laser Marker

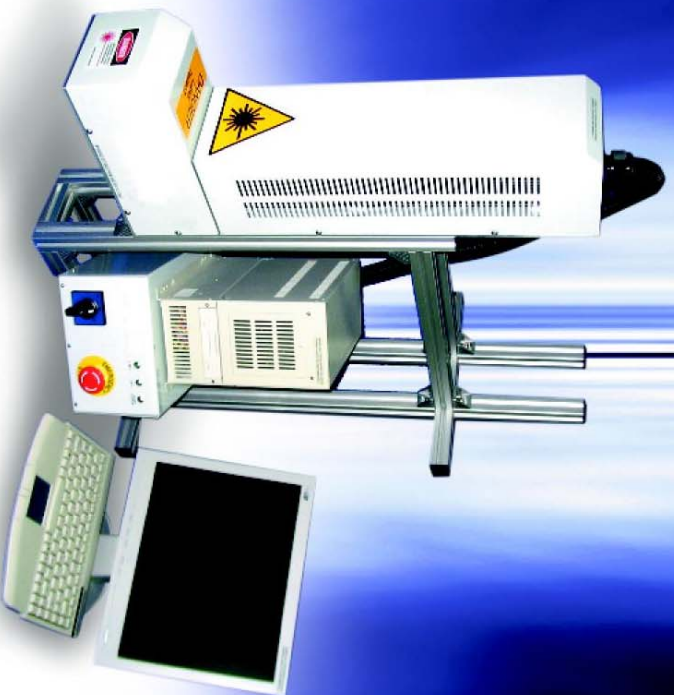

Leader In Laser Solutions

- Features:
- Wavelength: 10.6 um
 - High Speed Marking
 - Small Footprint
 - Low Maintenance
 - Compact Size
 - Laser Marker for IC Chips
 - Achieved an output up to 40k units per hour on Isemeca System
 - Excellent Marking Quality & Reliability
 - Excellent Marking for IC Chips of 'SOT' & 'SC' families

Laser Applications for:	
<input checked="" type="checkbox"/>	Marking
<input checked="" type="checkbox"/>	Cutting
<input checked="" type="checkbox"/>	Trimming



HYPERTRONICS

1022 Tai Seng Avenue, #06-35/14, Tai Seng Industrial Estate, Singapore 534415
 T: (65) 62800055 F: (65) 62849910 E: mail@hyllax.com W: www.hyllax.com
 Overseas Support Centres: India T: (91) 22 3947 1150, Malaysia T: (60) 4646 6118, Thailand T: (66) 2347 8643, China T: (86) 21 6873 9322

Infinity HT 6000 Series

HT6000 Vertical CO2 Laser Marker

Technical Specifications

CO2 Laser	
Wavelength (um)	10.6
Output Power (W)	10 *
Pulse Repetition (KHz)	5 to 20
Pulse to Pulse Stability (%)	< 5
Input Power (kw)	1
* Other output power available up to 100W	
HyScan 200 - Scanhead System	
Laser Beam Delivery:	Galvanometer Scanhead System
F-Theta Lens Marking Area (mm)	50 x 50 *
* Optional at 35 x 35, 70 x 70, 110 x 110, 140 x 140	
Utilities and Environment	
Power Supply:	230 VAC, Single Phase, 13 Amp
Operating Conditions	
Environment:	Area Under Ambient temperature without condensation
Temperature:	22 to 28 degree celsius (Optimum) 10 to 30 degree celsius (Normal)
Humidity:	Up to 70% RH maximum (Optimum & Normal)
Storage Conditions	
Environment:	Area without Condensation
Temperature:	5 to 45 degree celsius
Humidity:	Up to 75% RH maximum
Lens for Field Size (mm)	Working Distance (mm)
35 x 35	141
50 x 50	65
70 x 70	127*/146
110 x 110	165
140 x 140	215/277*

* Type D
 Note: The table above indicates one selection only that must be fixed at time of purchase.



PC Controller

Type of Controller: Windows based PC Controller
 Marking Software: Hypermark CAD Based, GUI marking software for creation and editing of marking layout.
 Text, Barcode, Data Matrix polygon creation within few mouse clicks

Optional features includes:

- Windows True Font
- Font Editor
- PLT, AutoCAD format import
- RS - 232 Serial Comm.
- TCP/IP comm. Via Win Socket
- BMP / Tiff marking

Options:

- Integrated Vision Inspection System
- Automatic & Semi-Auto Handlers
- Data Matrix and Linear Barcode Verifier
- Dust Collector/ Fume Extractor
- Red Targeting Laser
- Auto Power Calibration System
- Marking Software Customization



Hypertronics Pte Ltd

Warranty
 Hypertronics warrants each laser system to be free of material and manufacturing defects for a period of 1 year after shipment based upon normal equipment use as specified by Hypertronics and its personnel.

Legal Notices
 Due to continuous improvements, all product information are subjected to change without notice. Hyllax logo are trademarks of Hypertronics Pte Ltd. All rights reserved.