

3-port Multimode Optical Circulator

Features

Low Insertion Loss
 Wide Band
 High Isolation
 High Stability and Reliability
 Epoxy Free on Optical Path


Applications

Metro Area Network
 Wavelength Add / Drop
 Bi-Direction Communications

Specification:

Parameter	Value
Wavelength Range(nm)	1310+/-30, 1550+/-30
Insertion Loss (dB)	<1.2dB
Minimum Isolation (dB)	>30
PDL(dB)	<=0.2
PMD(ps)	<=0.06
Return Loss(dB)	>=40
Cross Talk(dB)	>=35
Operating Temperature(°C)	-0~70
Storage Temperature(°C)	-40~85
Input power(mW)	500mW

Imagine

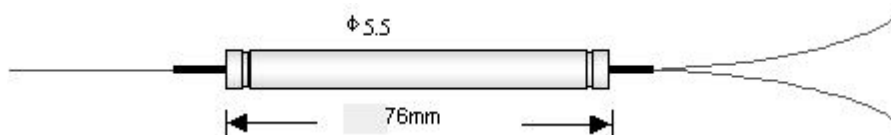

Ordering Information

MMCIR	Port	Wavelength	Fiber	Cable Type	Fiber length	Connector
	3=3 Port	13=1310nm 15=1550nm	M6=62.5um M5=50um	B=250um L=900um 3=3mm	10=1.0m 15=1.5m 20=2.0m 30=3.0m	NE=None FA=FC/APC FC=FC/PC SA=SC/APC SC=SC/PC ST=ST/PC LA=LC/APC LC=LC/PC XX=others