


2 Micron Fiber Amplifier

AP-AMP

AdValue Photonics' 2 μ m fiber amplifiers provide many advantages over traditional bulk Ho and Tm solid state systems with their compact size, high efficiency, low maintenance, and ease of use.

Applications:

- LIDAR
- Gas sensing
- Mid-IR generation
- Spectroscopy
- Test and measurement
- Research & development

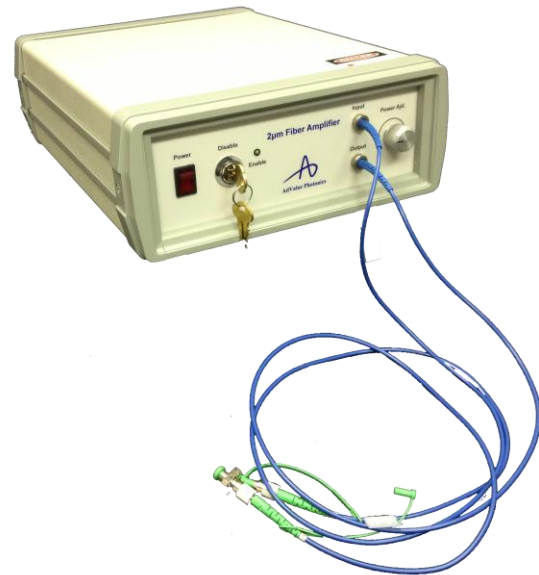

Features:

- Wide wavelength range
- Adjustable power level
- Diffraction limited beam quality
- Turn-key system with no maintenance

Optical Characteristics:


Parameter	Specification
Model	AP-AMP-2000
Gain wavelength range	1920-2020 nm
Output power (nominal)	200 mW (for 1 mW input at 1940-1980 nm)
Power adjustment	10-100% max.
Output power stability	±5% (8 hours at 25 °C)
Beam quality, M ²	< 1.1
Output polarization	Random (option: polarization maintaining)
Output fiber	Input: SMF-28 single mode fiber, 3 mm jacket, 1 m length, FC/APC connector Output: SMF-28 single mode fiber, 3 mm jacket, 1 m length, no connector

(Customization options available.)

General Characteristics:

Parameter	Specification
Operating temperature	10 to +35 °C
Storage temperature	-10 to +70 °C
Cooling	Forced air
Power requirement	AC 100~240V (50/60Hz)
Warm-up time	20 minutes
Package dimensions	260(W) x 340(D) x 105(H) mm
Weight	4.2 kg

Mechanical Outline:

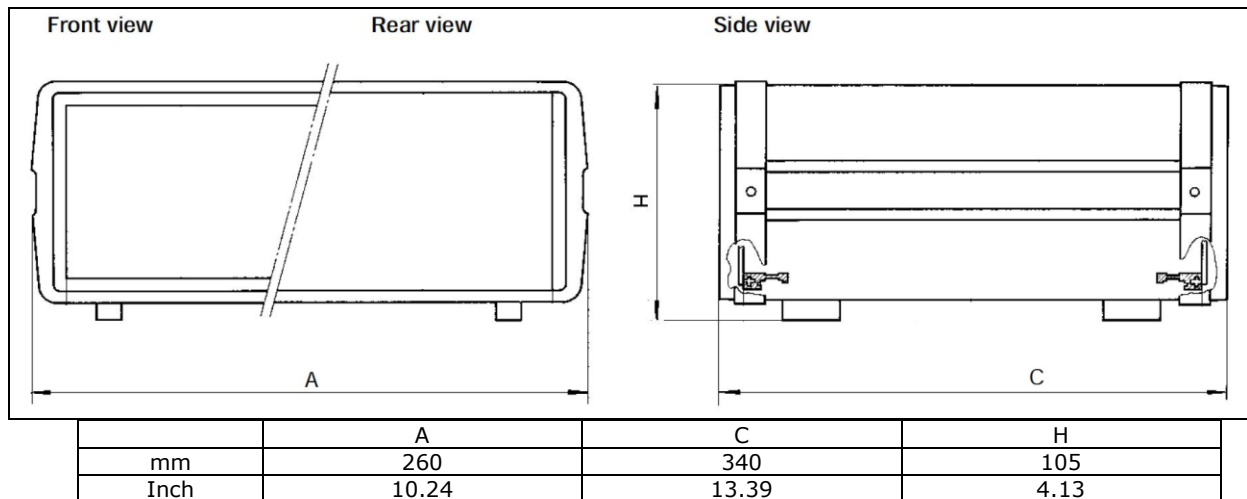

Ordering Information:

Part Number:	AP-AMP	-	xxxx	-	mxxx	-	xx		
			Standard Band: 2000 = 1940-1980 nm Custom Wavelength: xxxx = xxxx nm		Output Power: m200 = 200mW		Polarization: RP = random polarization PM = polarization maintaining		

(For special request, please contact AdValue Photonics at 1-520-790-5468 or sales@advaluephotonics.com.)



Specifications subject to change without notice