

2 Micron Mode-Locked Fiber Laser AP-ML

This world's first 2 μ m mode-locked fiber laser offers sub-picosecond pulse width and high beam intensity, providing a new state-of-the-art tool to research and industry applications.

AdValue Photonics' 2 μ m fiber lasers provide many advantages over traditional bulk Ho and Tm solid state lasers with their compact size, high efficiency, low maintenance, and ease of operation.


Applications:

- Mid-IR generation
- Nonlinear optics studies
- Spectroscopy
- Research & development



Features:

- Short pulse-width
- Broad spectral bandwidth
- Diffraction limited beam quality
- Turn-key system with no maintenance

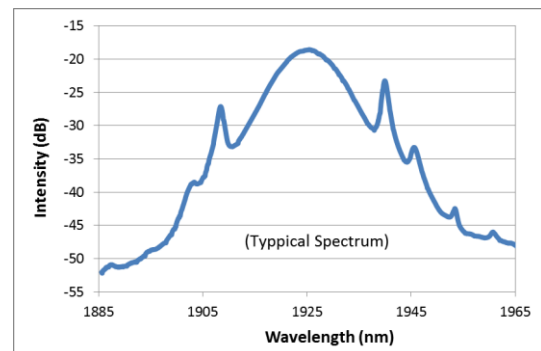

Optical Characteristics:

Parameter	Specification	
	950 fs Option	350 fs Option
Operating wavelength	1.95 \pm 0.05 μ m	1.95 \pm 0.05 μ m
Average power (nominal)	5 mW	3 mW
Pulse width	< 950 femtoseconds	< 350 femtoseconds
Pulse repetition rate	20-40 MHz (non-adjustable factory set)	30-50 MHz (non-adjustable factory set)
Spectral bandwidth	> 6 nm	> 18 nm
Beam quality, M ²	< 1.1	
Output polarization	Random	
Output fiber	SMF-28 single mode fiber, 3 mm jacket, 1 m length, no connector	


(Customization options available.)

Specifications subject to change without notice

General Characteristics:

Parameter	Specification
Operating temperature	+20 to +30 °C
Storage temperature	-10 to +70 °C
Cooling	Forced air
Power requirement	AC 100~240 V (50/60Hz)
Power consumption	< 15 W
Warm-up time	20 minutes
Package dimensions	260(W) x 340(D) x 105(H) mm

Mechanical Outline:

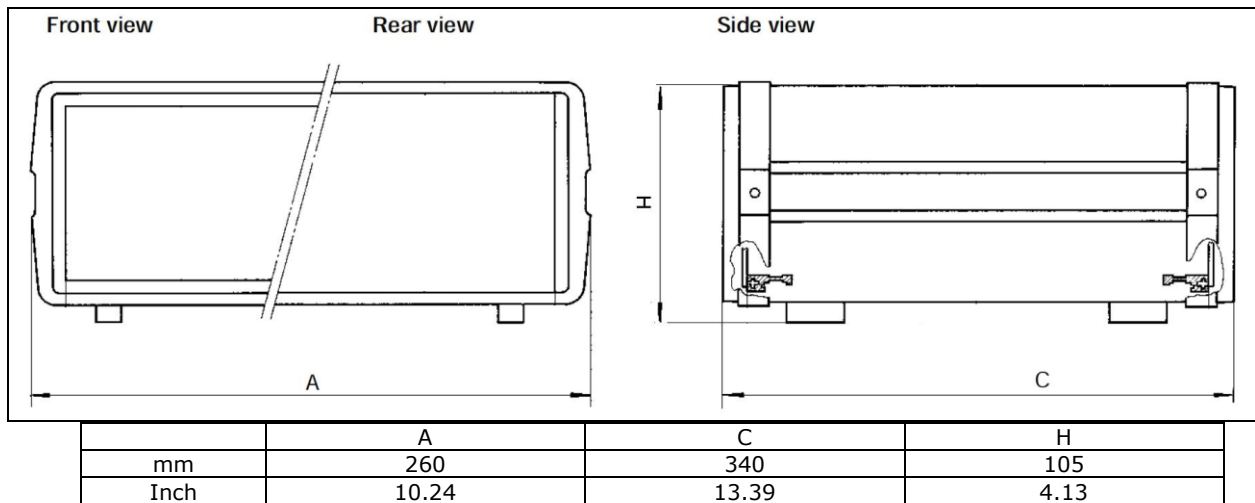

Ordering Information:

Part Number:	AP-ML	-	1950	-	mxxx	-	RP	xxx
			Operating Wavelength: 1950 = 1.95±0.05 μm		Output Power: m003 = 5 mW m005 = 3 mW		Polarization: RP = random polarization	Pulse Option: 950 = 950 fs Option 350 = 350 fs Option

(For special request, please contact AdValue Photonics at 1-520-790-5468 or sales@advaluephotonics.com.)



Specifications subject to change without notice