


4/8/12/16/18 Ch CCWDM

Feature:

- ♦ Low insertion loss
- ♦ High channel isolation
- ♦ Exceptional reliability and stability
- ♦ Commercial(0-70℃)&Industrial(-40~85℃) Optional
- ♦ Telcordia GR-1221 and GR-1209 compliant

Application:

- ♦ Access network
- ♦ Metro WDM system
- ♦ Fiber optic instrument

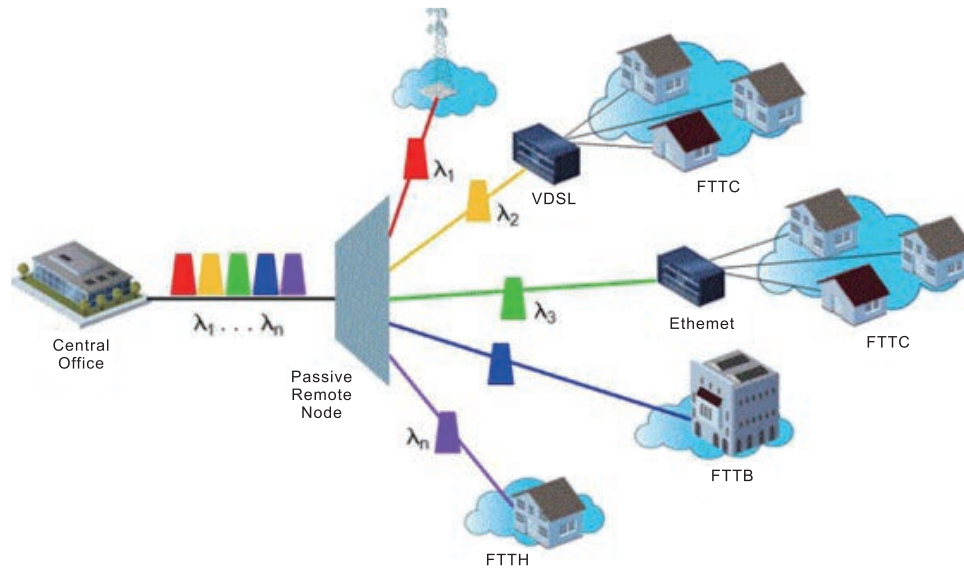

Product	Port Configuration	Insertion Loss (dB)		Dimension(mm)
		Commercial	Industry	
CCWDM	1x4	1	1.2	45x26x6.8
	1x6	1.2	1.4	45x26x6.8
	1x8	1.4	1.6	45x26x6.8
	1x12	1.5	1.7	50x51x7
	1x16	1.6	1.8	50x51x7
	1x18	1.8	2	50x51x7

