

# LIDT TEST RESULTS

## LIDT VALUE

 $10^6\text{-on-1}$ 
 $0.376^{+0.029}_{-0.028} \text{ J/cm}^2$ 

## CHARACTERISTIC DAMAGE CURVE

Table 1: Estimated LIDTs from fitting model for sample CAM26\_EQ\_FM .

Test mode	Threshold (Catastrophic)
1-on-1	$0.445^{+0.035}_{-0.034} \text{ J/cm}^2$
10-on-1	$0.388^{+0.038}_{-0.036} \text{ J/cm}^2$
$10^2\text{-on-1}$	$0.377^{+0.028}_{-0.027} \text{ J/cm}^2$
$10^3\text{-on-1}$	$0.377^{+0.028}_{-0.027} \text{ J/cm}^2$
$10^4\text{-on-1}$	$0.376^{+0.029}_{-0.028} \text{ J/cm}^2$
$10^5\text{-on-1}$	$0.376^{+0.029}_{-0.028} \text{ J/cm}^2$
$10^6\text{-on-1}$	$0.376^{+0.029}_{-0.028} \text{ J/cm}^2$

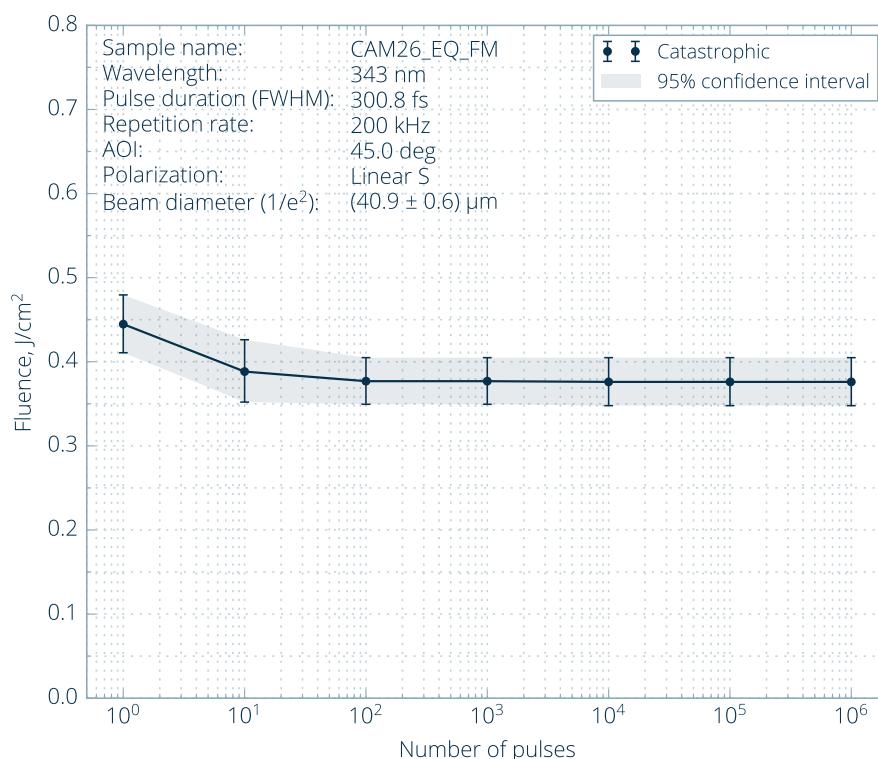


Figure 2. Characteristic damage curve.