

LIDT TEST RESULTS

LIDT VALUE

10^3 -on-1

$168.0 \begin{array}{l} +3.9 \\ -14.9 \end{array} \text{ J/cm}^2$

CHARACTERISTIC DAMAGE CURVE

Table 1: Estimated LIDTs from fitting model for sample PAN5614.

Test mode	Threshold (Offline detection - microscopy)	Threshold (Online detection - scattering)
1-on-1	$168.1 \begin{array}{l} +3.8 \\ -15.0 \end{array} \text{ J/cm}^2$	$168.1 \begin{array}{l} +3.8 \\ -11.3 \end{array} \text{ J/cm}^2$
10-on-1	-	$168.0 \begin{array}{l} +3.9 \\ -11.2 \end{array} \text{ J/cm}^2$
10^2 -on-1	-	$168.0 \begin{array}{l} +3.9 \\ -13.1 \end{array} \text{ J/cm}^2$
10^3 -on-1	$168.0 \begin{array}{l} +3.9 \\ -14.9 \end{array} \text{ J/cm}^2$	$168.0 \begin{array}{l} +3.9 \\ -23.5 \end{array} \text{ J/cm}^2$

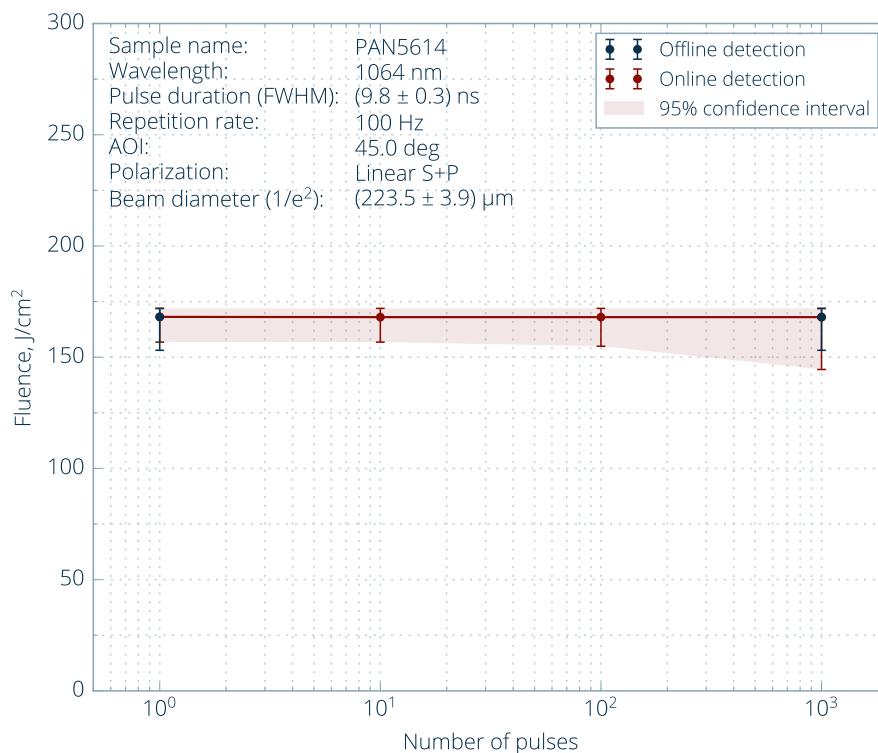


Figure 2. Characteristic damage curve.