

2023 CATALOG


THE LEADER IN OPTICAL TRANSCEIVERS
FOR NEXT GENERATION NETWORKS

Time to Market | Time to Cost | Time to Volume



For Intra and Inter Data Center Connectivity

Most Complete Product Portfolio of 25G, 40G, 100G, 200G, 400G and 800G in the Industry

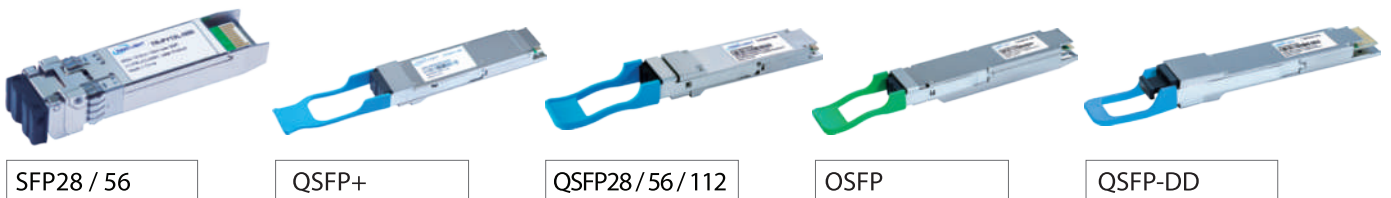

InnoLight Product Catalogue

	P/N	Product Description	Data Rate (Gb/s)	TX	RX	Transmitter Power (dBm) ¹		Receiver Power (dBm) ¹		Max Power Consumption (W)	Reach	Temperature (deg C)	
						Min	Max	Min	Max				
QSFP+	TR-QQ85S-N00	QSFP+ SR4	40G	850nm VCSEL	PIN	-7.6	1.0	-9.5	2.4	1.5	100m	0~70	
	TR-QQ85X-N00	QSFP+ eSR4	40G	850nm VCSEL	PIN	-7.3	1.0	-9.9	2.4	1.5	300m	0~70	
	TR-QQ13T-N00	QSFP+ IR4	40G	DFB CWDM	PIN	-7.0	2.3	-11.7	2.3	3.5	2km	0~70	
	TR-QQ13L-N00	QSFP+ LR4	40G	DFB CWDM	PIN	-7.0	2.3	-13.7	2.3	3.5	10km	0~70	
	TR-QQ13Y-N00	QSFP+ LX4	MMF SMF	40G	DFB CWDM	PIN	-5.0	3.5	-7.0	3.5	3.5	150m	0~70
							-7.0	2.3	-11.7	2.3	3.5	2km	0~70
	TR-IQ13C-N00	QSFP+ PSM LR4	40G	1310nm DFB	PIN	-5.5	1.5	-11.5	1.5	3.5	1.4km	0~70	
TR-IQ13L-N00	QSFP+ PSM LR4	40G	1310nm DFB	PIN	-5.5	1.5	-12.6	1.5	3.5	10km	0~70		
SFP28	TR-PY85S-N00	SFP28 SR	25G	850nm VCSEL	PIN	-8.4	2.4	-10.3	2.4	1.0	100m	0~70	
	TR-PY13L-N00	SFP28 LR	25G	1310nm DFB	PIN	-7.0	2.0	-13.3	2.0	1.0	10km	0~70	
	TR-PY13E-N00	SFP28 ER	25G	1310nm EML	APD	-3.0	6.0	-21.0	-4.0	1.5	40km	0~70	
	TF-PYxxx-N00	SFP28 AOC	25G	850nm VCSEL	PIN	N/A	N/A	N/A	N/A	1.0 (each SFP28)	1~100m	0~70	
SFP56	TR-PF85S-N00	SFP56 SR	50G	850nm VCSEL	PIN	-7.5	4.0	N/A	4.0	1.5	100m	0~70	
	TR-PF13L-N00	SFP56 LR	50G	1310nm DFB	PIN	-4.5	4.2	-10.8	4.2	1.8	10km	0~70	
QSFP56	T-FX4FNS-N00	QSFP56 SR4	200G	850nm VCSEL	PIN	-6.5	4.0	-8.4	4.0	5.5	100m	0~70	
	T-FX4FNT-H00	QSFP56 FR4	200G	EML CWDM4	PIN	-4.2	4.7	-8.2	4.7	6.5	2km	10~60	
	C-FX4FNMxxx-N00	QSFP56 AOC	200G	850nm VCSEL	PIN	N/A	N/A	N/A	N/A	5.5 (each side)	1~100m	0~70	
	C-FXT4FNMxxx-N00	QSFP56 200G to QSFP 28*100G AOC	200G	850nm VCSEL	PIN	N/A	N/A	N/A	N/A	6.0 (200G side) 4.0 (100G side)	1~100m	0~70	
QSFP112	T-GQ4CNS-N00	QSFP112 SR4	400G	850nm VCSEL	PIN	-4.6	4.0	-6.4	4.0	9.0	100m	0~70	
	T-GP4CNH-N00	QSFP112 DR4	400G	1310nm Siph	PIN	-2.9	4.0	-5.9	4.0	10.0	500m	0~70	
	T-GQ4CNT-N00	QSFP112 FR4	400G	Siph CWDM4	PIN	-3.2	4.4	-7.2	4.4	10.0	2km	0~70	

1. Transmitter and receiver powers are in average, unless specified otherwise.

2. Specification shown is for OTN OTU4 application. The specification for Ethernet application is the same as the specification of TR-FC13R-N00 & TR-FC13D-N00.

InnoLight Product Catalogue

	P/N	Product Description	Data Rate (Gb/s)	TX	RX	Transmitter Power (dBm) ¹		Receiver Power (dBm) ¹		Max Power Consumption (W)	Reach	Temperature (deg C)	
						Min	Max	Min	Max				
QSFP28	TR-FC85S-N00	QSFP28 SR4	100G	850nm VCSEL	PIN	-8.4	2.4	-10.3	2.4	3.5	100m	0~70	
	TR-FC13T-N00	QSFP28 CWDM4	100G	DFB CWDM	PIN	-6.5	2.5	-11.5	2.5	3.5	2km	0~70	
	TR-FC13X-N00	QSFP28 eCWDM4	100G	DFB CWDM	PIN	-6.5	2.5	-13.0	2.5	3.5	10km	0~70	
	TR-VC13T-N00	QSFP28 PSM4	100G	1310nm DFB	PIN	-5.5	2.0	-10.2	2.0	3.5	2km	0~70	
	TP-VC13Txxxx-N00	QSFP28 PSM4 Pigtail	100G	1310nm DFB	PIN	-5.5	2.0	-10.2	2.0	3.5	2km	0~70	
	TR-VC13L-N00	QSFP28 PSM LR4	100G	1310nm DFB	PIN	-5.5	2.0	-13.7	2.0	3.5	10km	0~70	
	TR-FC13R-N00	QSFP28 LR4 Ethernet	100G	1296-1309nm LWDM DFB	PIN	-4.3	4.5	-10.6	4.5	4.0	10km	0~70	
	TR-FC13Y-N00	QSFP28 LX4	100G	DFB CWDM	PIN	-3.5	4.5	-11.5	4.5	3.5	100m	0~70	
	TR-FC13D-N00	QSFP28 ER4 Lite	100G	1296-1309nm LWDM EML	APD	-2.5	6.5	-16.65	-3.5	4.5	30km	0~70	
							-2.5	6.5	-20.5	-3.5	4.5	40km (w/ FEC)	0~70
							-0.7	6.5	-14.85	-3.5	4.5	30km	0~70
							-0.7	6.5	-18.7	-3.5	4.5	40km (w/ FEC)	0~70
QSFP28 Single Lambda	TF-FCxxx-N00	QSFP28 AOC	100G	850nm VCSEL	PIN	N/A	N/A	N/A	N/A	2.5 (each QSFP28)	1~100m	0~70	
	TF-FPQYxxx-N00	QSFP28 to 4x SFP28 AOC	100G	850nm VCSEL	PIN	N/A	N/A	N/A	N/A	3.5 (QSFP28) 1.0 (each SFP28)	1~100m	0~70	
	T-TB2FDS-N00	QSFP28 SR1.2 BIDI	100G	850nm VCSEL	PIN	-6.2	4.0	-8.2	4.0	4.0	100m	0~70	
	TR-ZC13H-N00	QSFP28 DR1 (PAM4)	100G	1310nm EML / Sipro	PIN	-2.9	4.0	-5.9	4.0	4.0	500m	0~70	
	TR-ZC13T-N00	QSFP28 FR1 (PAM4)	100G	1310nm EML / Sipro	PIN	-2.4	4.0	-6.4	4.5	4.0	2km	0~70	
TR-ZC13L-N00	QSFP28 LR1 (PAM4)	100G	1310nm EML / Sipro	PIN	-1.4	4.5	-7.7	4.5	4.0	10km	0~70		
OSFP	T-OS8FNS-N00	OSFP SR8	400G	850nm VCSEL	PIN	-6.0	4.0	-7.9	4.0	9.0	100m	0~70	
	T-OP4CNH-N00	OSFP DR4	400G	1310nm EML	PIN	-2.9	4.0	-5.9	4.0	9.0	500m	0~70	
	T-OP4CNT-N00	OSFP DR4+	400G	1310nm EML	PIN	-2.4	4.0	-6.4	4.5	9.0	2km	0~70	
	C-OS8FNMxxx-N00	OSFP AOC	400G	850nm VCSEL	PIN	N/A	N/A	N/A	N/A	9.0 (each OSFP)	1~100m	0~70	
	T-OL8FNT-N00	OSFP 2xFR4 Dual Duplex LC	400G	Sipro CWDM4	PIN	-4.2	4.7	-8.2	4.7	11.0	2km	0~70	
	T-OH8CNS-N00	OSFP SR8 Dual MPO12	800G	850nm VCSEL	PIN	-4.6	4.0	-6.4	4.0	14.0	50m	0~70	
	T-OL8CNL-N00	OSFP 2xLR4 Dual Duplex LC	800G	EML CWDM4 / Sipro CWDM4	PIN	-2.7	5.1	-9.0	5.1	16.5	10km	0~70	
	T-OL8CNT-N00	OSFP 2xFR4 Dual Duplex LC	800G	EML CWDM4 / Sipro CWDM4	PIN	-3.3	3.5	-7.3	3.5	16.0	2km	0~70	
	T-OP8CNH-N00	OSFP DR8 MPO16	800G	1310nm EML / Sipro	PIN	-2.9	4.0	-5.9	4.0	16.0	500m	0~70	
	T-OP8CNT-N00	OSFP DR8+ MPO16	800G	1310nm EML / Sipro	PIN	-2.4	4.0	-6.4	4.5	16.0	2km	0~70	
	T-OH8CNT-N00	OSFP DR8+ Dual MPO12	800G	1310nm EML / Sipro	PIN	-2.4	4.0	-6.4	4.5	16.0	2km	0~70	
	T-OH8CNL-N00	OSFP 8x100G LR Dual MPO12	800G	1310nm EML / Sipro	PIN	-1.9	4.8	-8.2	4.8	16.5	10km	0~70	
C-OS8CNSxxx-N00	OSFP AOC	800G	Sipro Based	Siph Based	N/A	N/A	N/A	N/A	14.0	100m	0~70		
QSFP-DD	T-DQ8FNS-N00	QSFP-DD SR8	400G	850nm VCSEL	PIN	-6.5	4.0	-7.9	4.0	9.0	100m	0~70	
	T-DQ4CNS-N00	QSFP-DD SR4	400G	850nm VCSEL	PIN	-4.6	4.0	-6.4	4.0	8.0	100m	0~70	
	T-DP4CNH-N00	QSFP-DD DR4	400G	1310nm EML / Sipro	PIN	-2.9	4.0	-5.9	4.0	9.0	500m	0~70	
	T-DP4CNT-N00	QSFP-DD DR4+	400G	1310nm EML / Sipro	PIN	-2.4	4.0	-6.4	4.5	9.0	2km	0~70	
	T-DP4CNL-N00	QSFP-DD 4x100G LR	400G	1310nm EML / Sipro	PIN	-1.4	4.5	-7.7	4.5	10.0	10km	0~70	
	T-DQ4CNT-N00	QSFP-DD FR4	400G	EML CWDM4	PIN	-3.3	3.5	-7.3	3.5	10.5	2km	0~70	
	T-DQ4CNL-N00	QSFP-DD LR4	400G	EML CWDM4	PIN	-1.4	4.5	-7.7	4.5	11.0	10km	0~70	
	T-DQ4CND-N00	QSFP-DD ER4 Lite	400G	EML LWDM4	APD	0.4	6.5	-13.5	-3.4	12.0	30km	0~70	
	C-DQ8FNMxxx-H00	QSFP-DD AOC	400G	850nm VCSEL	PIN	N/A	N/A	N/A	N/A	9.0 (each QSFP-DD)	1~100m	0~70	
	C-DQ8FNMxxx-N00	QSFP-DD 400G to QSFP56 2x200G AOC	400G	850nm VCSEL	PIN	N/A	N/A	N/A	N/A	9.0 (400G side) 6.0 (200G side)	1~100m	0~70	
	T-DP8CNT-N00	QSFP-DD DR8+ MPO16	800G	1310nm EML / Sipro	PIN	-2.4	4.0	-6.4	4.5	16.0	2km	0~70	
	T-DH8CNT-N00	QSFP-DD DR8+ Dual MPO12	800G	1310nm EML / Sipro	PIN	-2.4	4.0	-6.4	4.5	16.0	2km	0~70	
	T-DH8CNL-N00	QSFP-DD 8x100G LR Dual MPO12	800G	1310nm EML / Sipro	PIN	-1.9	4.8	-8.2	4.8	17.0	10km	0~70	
	T-DC8CNT-N00	QSFP-DD 2xFR4 CS	800G	EML CWDM4	PIN	-3.3	3.5	-7.3	3.5	16.0	2km	0~70	
	T-DL8CNT-N00	QSFP-DD 2xFR4 Dual Duplex LC	800G	EML CWDM4 / Sipro CWDM4	PIN	-3.3	3.5	-7.3	3.5	16.0	2km	0~70	
	T-DL8CNL-N00	QSFP-DD 2xFR4 Dual Duplex LC	800G	EML CWDM4 / Sipro CWDM4	PIN	-2.7	5.1	-9.0	5.1	17.0	10km	0~70	
	C-DQ8CNSxxx-N00	QSFP-DD AOC	800G	Sipro Based	Siph Based	N/A	N/A	N/A	N/A	16.0	100m	0~70	
T-DB8FNS-N00	QSFP-DD SR4.2 BIDI	400G	850nm VCSEL	PIN	-6.5	4.0	-8.5	4.0	10.0	150m (w/OM5)	0~70		



For 5G Wireless Fronthaul, Midhaul and Backhaul

Optimized 25G , 50G , 100G , 200G and 400G Solutions



SFP28 / 56



QSFP28



QSFP-DD

InnoLight Product Catalogue

	P/N	Product Description	Data Rate (Gb/s)	TX	RX	Transmitter Power (dBm) ¹		Receiver Power (dBm) ¹		Max Power Consumption (W)	Reach	Temperature (deg C)
						Min	Max	Min	Max			
SFP28	TR-PY85S-V00	SFP28 SR IT	25G	850nm VCSEL	PIN	-8.4	2.4	-10.3	2.4	1.0	100m	-40~85
	TR-PY13H-V00	SFP28 LR Lite IT	25G	1310nm DFB	PIN	-7.0	2.0	-10.5	2.0	1.2	300m	-40~85
	TR-PY13L-V00	SFP28 LR IT	25G	1310nm DFB	PIN	-7.0	2.0	-13.3	2.0	1.2	10km	-40~85
	TR-DYxxL-V00	SFP28 LR BIDI IT	25G	1270/1330nm DFB	PIN	-7.0	2.0	-13.3	2.0	1.0	10km	-40~85
	TR-LYxxL-V00	SFP28 LR CWDM IT	25G	DFB CWDM	PIN	-2.0	6.0	-13.3	2.5	1.5	10km	-40~85
	TR-RYxxL-V00	SFP28 LR LWDM IT	25G	DFB LWDM	PIN	-3.0	3.0	-15.3	3.0	1.5	10km	-40~85
	TR-RYxxI-V00	SFP28 IR LWDM IT	25G	EML LWDM	APD	-2.0	6.0	-21.0	-4.0	1.8	20km	-40~85
	TR-MYxxE-V00	SFP28 LR MWDM IT(15km)	25G	DFB MWDM	APD	2.0	7.0	-19.0	-4.0	2.0	15km	-20~85
	TR-MYxxL-V00	SFP28 LR MWDM IT (10km)	25G	DFB MWDM	PIN	2.0	7.0	-14.0	2.0	2.0	10km	-20~85
	TR-GYxxI-V00	SFP28 IR DWDM IT	25G	EML DWDM	APD	-2.0	6.0	-21.0	-4.0	1.8	20km	-40~85
SFP56	TR-PY13E-N00	SFP28 ER	25G	1310nm EML	APD	-3.0	6.0	-21.0	-4.0	1.5	40km	0~70
	TR-PY13E-V00	SFP28 ER IT	25G	1310nm EML	APD	-3.0	6.0	-21.0	-4.0	1.8	40km	-40~85
	TR-PF13L-V00	SFP56 LR IT	50G	1310nm DFB	PIN	-4.5	4.2	-10.8	4.2	1.8	10km	-40~85
QSFP28	TR-DFxxL-V00	SFP56 LR BIDI IT	50G	1270/1330nm DFB	PIN	-4.1	4.5	-10.8	4.5	1.8	10km	-40~85
	TR-LFxxL-V00	SFP56 LR CWDM IT	50G	DFB CWDM	PIN	0.5	7.0	-10.8	4.5	2.0	10km	-40~85
	TR-FC85S-E00	QSFP28 SR4 (CPRI)	100G	850nm VCSEL	PIN	-8.4	2.4	-10.3	2.4	2.5	100m	-10~75
	TR-FC13X-R00	QSFP28 eCWDM4 ET	100G	DFB CWDM	PIN	-6.5	2.5	-13.0	2.5	4.5	10km	-20~85
	TR-FC13R-N00	QSFP28 LR4 Ethernet	100G	1296-1309nm LWDM DFB	PIN	-4.3	4.5	-10.6	4.5	4.0	10km	0~70
	TR-FC13D-N00	QSFP28 ER4 Lite	100G	1296-1309nm LWDM EML	APD	-2.5	6.5	-16.65	-3.5	4.5	30km 40km (w/ FEC)	0~70
	TR-FC13E-N00	QSFP28 ER4	100G	1296-1309nm LWDM EML	PIN w/ SOA	-2.9	2.9	-20.9	-3.5	5.5	40km	0~70
QSFP28 Single Lambda	TR-FC13Z-N00	QSFP28 ZR4	100G	1296-1309nm LWDM EML	PIN w/ SOA	2.0	6.5	-29.0	-3.5	5.5	80km (w/ FEC)	0~70
	TR-FF13L-N00	QSFP28 LR (PAM4)	50G	1310nm EML	PIN	-4.5	4.2	-10.3	4.2	3.5	10km	0~70
	TR-FF13E-N00	QSFP28 ER (PAM4)	50G	1310nm EML	APD	0.4	6.6	-17.6	-3.4	3.5	40km	0~70
	TR-BFxxL-N00	QSFP28 LR BIDI (PAM4)	50G	1270/1330nm EML	PIN	-4.5	4.2	-10.8	4.2	3.5	10km	0~70
	TR-BFxxE-N00	QSFP28 ER BIDI (PAM4)	50G	1295/1309nm EML	APD	0.4	6.6	-17.6	-3.4	3.5	40km	0~70
	TR-ZC13L-N00	QSFP28 LR (PAM4)	100G	1310nm EML	PIN	-1.4	4.5	-7.7	4.5	4.5	10km	0~70
	TR-BCxxL-N00	QSFP28 LR BIDI (PAM4)	100G	1270/1330nm EML	PIN	-1.4	4.5	-7.7	4.5	4.5	10km	0~70
	TR-ZC13E-N00	QSFP28 ER (PAM4)	100G	1310nm EML	APD	1.7	7.1	-16.0	-3.4	4.5	40km	0~70
QSFP-DD	TR-BCxxE-N00	QSFP28 ER BIDI (PAM4)	100G	1304/1309nm EML	APD	1.7	7.1	-16.0	-3.4	4.5	40km	0~70
	T-DQ4FNL-N00	QSFP-DD LR4	200G	EML LWDM	PIN	-3.4	5.3	-9.7	5.3	12.0	10km	0~70
	T-DQ4FNE-N00	QSFP-DD ER4	200G	EML LWDM	APD	0.0	6.5	-15.5	-3.0	12.0	40km	0~70
	T-DQ4CNL-N00	QSFP-DD LR4	400G	EML CWDM	PIN	-2.8	4.0	-9.1	4.0	12.0	10km	0~70
T-DQ4CNE-N00	QSFP-DD ER4 Lite	400G	EML LWDM	APD	0.4	6.5	-13.5	-3.4	12.0	30km	0~70	

1. Transmitter and receiver powers are in average, unless specified otherwise.



For Metro, DCI and 5G Backhaul Coherent Transmission

Newly Launched 100G, 200G and 400G Coherent Transceivers



CFP2



OSFP



QSFP-DD

InnoLight Product Catalogue

	P/N	Product Description	Client Side	Line Side Modulation Format	Line Side FEC mode	Typical OSNR Sen (dB)	Transmitter Power (dBm)		Receiver Power (dBm)		Max Power Consumption (W)	Reach	Case Temperature (deg C)
							Min	Max	Min	Max			
CFP2 DCO	CT-CTS100SMRTA00	100G CFP2 DCO,C Band, 50GHz Grid, 191.3-196.1GHz	OTU4 / 100GE	100G DP-QPSK	OFEC	11.5	-8.0	5.0	-18.0	5.0	21.0	MR / ZR+	0~70
	CT-CTS200SMRTA00	200G CFP2 DCO,C Band, 50GHz Grid, 191.3-196.1GHz	2*OTU4/2*100GE/200GE OTU4/100GE	200G DP-16QAM 100G DP-QPSK	OFEC	19.5	-8.0	5.0	-18.0	5.0	24.0	MR / ZR+	0~70
	CT-CTS400SMRTA00	400G CFP2 DCO,C Band, 75GHz Grid, 191.3-196.1GHz	4*OTU4 / 4*100GE / 2*200GE / 400GE	400G DP-16QAM	OFEC	22	-8.0	5.0	-12.0	0.0	30.0	MR	0~70
	CT-CTS400SLHTA00	400G CFP2 DCO,C Band, 75GHz Grid, 191.3-196.1GHz	4*OTU4 / 4*100GE / 400GE / 2*OTU4 / 200GE / 2*100GE	400G DP-16QAM PS 200G DP-16QAM PS 200G DP-QPSK	SDFEC	21	-8.0	5.0	-12.0	0.0	25.0	LH	0~70
OSFP DCO	CT-OSS400SZRTA00	400G OSFP DCO,C Band, 75GHz Grid, 191.3-196.1GHz	400GE	400G DP-16QAM	CFEC	24	-10.0	-8.0	-12.0	0.0	18.0	ZR	0~75
	CT-OSS400SZPTA00	400G OSFP DCO,C Band, 75GHz Grid, 191.3-196.1GHz	4*100GE / 400GE	400G DP-16QAM	OFEC	22	-10.0	-8.0	-12.0	0.0	21.0	Open ZR+	0~75
QSFP-DD DCO	CT-QDS100SMRTA00	100G QSFP-DD DCO, C Band, 50GHz Grid, 191.15-196.1GHz	OTU4 / 100GE	100G DP-QPSK	SCFEC / OFEC	14 / 11	-10.0	-6.0	-18.0	0.0	16.0	MR	0~75
	CT-QDS400SZRTA00	400G QSFP-DD DCO, C Band, 75GHz Grid, 191.15-196.1GHz	400GE	400G DP-16QAM	CFEC	24	-10.0	-8.0	-12.0	0.0	18.0	ZR	0~75
	CT-QDS400SZPTA00	400G QSFP-DD DCO, C Band, 75GHz Grid, 191.15-196.1GHz	4*100GE / 400GE	400G DP-16QAM	OFEC	22	-10.0	-8.0	-12.0	0.0	21.0	Open ZR+	0~75
	CT-QDS400MZPTA00	Multi-rate OpenZR+ QSFP-DD DCO,C Band, 75GHz Grid, 191.15-196.1GHz	4*100GE / 400GE 3*100GE 2*100GE 100GE	400G DP-16QAM 300G DP-8QAM 200G DP-QPSK 100G DP-QPSK	OFEC	22	-10.0	-8.0	-12.0	0.0	21.0	Open ZR+	0~75



サンインストルメント株式会社

〒141-0031 東京都品川区西五反田 2-26-9 五輪プラザビル 4F
Tel:03-5436-9361 Fax:03-5436-9364 E-mail:sun@sun-ins.com

www.sun-ins.com

InnoLight Technology Contact:
sales@innolight.com

Corporate Headquarters (China-Suzhou)
8 Xiasheng Road, Suzhou Industrial Park,
Suzhou, Jiangsu, 215126, China
TEL: (86) 512-86669288

SHENZHEN

TEL: (+86) 755 2699 8918

USA

TEL: (+1) 408 216 8889

SINGAPORE

TEL: (+65) 6261 5268

TAIWAN

TEL: (+886) 3 452 3186

THAILAND

TEL: (+66) 36 676888